



Piano Solo

erba




- Struttura:** struttura in metallo, molleggio con cinghie elastiche, ricoperta con poliuretano espanso HD/60, 40/PH e rivestita con fibra poliestere 200 gr/mq. Piedi in acciaio cromo satinato opaco.
- Structure:** metal frame, springing system with elastic webbing, padded with non-deformable polyurethane foam HD/60, 40/PH and covered with polyester fibre 200 gr/m². Steel feet with satin matt chrome finish.
- Cuscino sedile:** imbottitura in piuma d'oca vergine con inserto in poliuretano espanso indeformabile a densità differenziate PF 40/PFR e 40/PH.
- Seat cushion:** filled with natural goose feather and non-deformable polyurethane foam insert with different densities PF 40/PFR and 40/PH.
- Cuscino schienale:** imbottitura in piumafill: 70% piuma naturale + 30% fibra poliestere HCS con inserto in poliuretano espanso indeformabile T 30/C.
- Back cushion:** filled with piumafill: 70% natural feather + 30% polyester fiber HCS and non-deformable polyurethane foam insert T 30/C.
- Cuscino bracciolo:** imbottitura in piumafill: 70% piuma naturale + 30% fibra poliestere HCS con inserto in poliuretano espanso indeformabile PF 40/FR e T 18/S.
- Arm cushion:** filled with piumafill: 70% natural feather + 30% polyester fiber HCS and non-deformable polyurethane foam insert PF 40/FR and T 18/S.
- Cuscino opzionale:** imbottitura in piuma d'oca vergine.
- Optional cushion:** natural goose feather filled cushion.
- Rivestimenti:** il modello è realizzabile in tessuto o pelle. I cuscini opzionali sono sfoderabili.
- Covers:** covers can be made with fabric or leather and are removable on optional cushions.

POLIURETANO ESPANSO SENZA C.F.C.
POLYURETHANE FOAM C.F.C. FREE

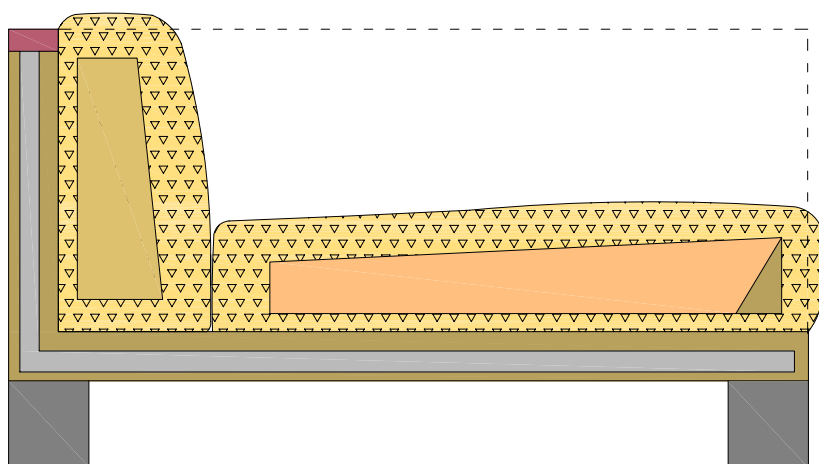


- Poliuretano T 30/C (2,7 kPa)
Polyurethane T 30/C (2,7 kPa)
- Poliuretano PF 40/PFR (3,0 kPa)
Polyurethane PF 40/PFR (3,0 kPa)
- Piuma d'oca vergine
Natural goose feather
- Poliuretano HD/60 (13,5 kPa)
Polyurethane HD/60(13,5 kPa)
- Poliuretano 40/PH (8,0 kPa)
Polyurethane 40/PH (8,0 kPa)
- Base telaio metallo
Metal frame
- Piede
Feet

69
27"



• 105/41" •



• 125/49" •